



**ETG Inc.**

**8599 Venice Blvd., Unit K**

**Phone: + 1 (310) 202-6400**

**<http://www.etgtech.com/>**

**Los Angeles, Ca 90034, U. S. A.**

**Fax: +1 (310) 202-6406**

**E-Mail: [info@etgtech.com](mailto:info@etgtech.com)**

# **ETG-3CE470-30**

## DATA SHEET

QC:

ENG:

Prepared By:




**ETG Inc.**

8599 Venice Blvd., Unit K  
 Phone: +1 (310) 202-6400  
<http://www.etgtech.com/>

Los Angeles, Ca 90034, U. S. A.  
 Fax: +1 (310) 202-6406  
 E-Mail: [info@etgtech.com](mailto:info@etgtech.com)

**Features:**

- ◆ High intensity
- ◆ Standard T-1 3/4 diameter package
- ◆ General purpose leads
- ◆ Reliable and rugged

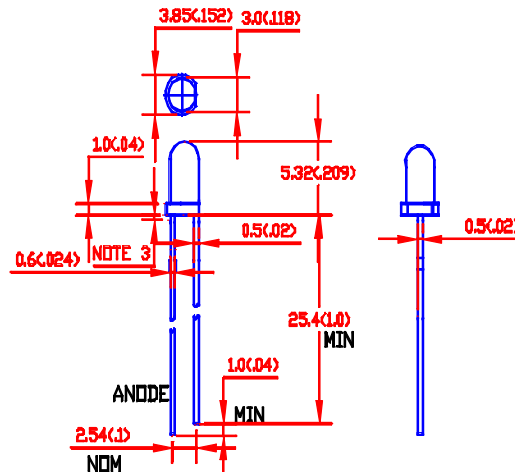

Part NO.	Chip Material	Lens Color	Source Color
ETG-3CE470-30	InGaN/SiC	Water Clear	Super Bright Blue

**Notes:**

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25$  mm (.010") unless otherwise noted.
3. Protruded resin under flange is 1.0mm(.04") max.
4. Lead spacing is measured where the leads emerge from the package.

**Absolute Maximum Ratings at Ta=25?**

Parameter	MAX.	Unit
Power Dissipation	75	mW
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA
Continuous Forward Current	30	mA



**ETG Inc.**

**8599 Venice Blvd., Unit K  
Phone: + 1 (310) 202-6400**

<http://www.etgtech.com/>

**Los Angeles, Ca 90034, U. S. A.**

**Fax: +1 (310) 202-6406**

**E-Mail: [info@etgtech.com](mailto:info@etgtech.com)**

Derating Linear From 50?	0.4	mA/?
Reverse Voltage	5	V
Operating Temperature Range	-40? to +100?	
Storage Temperature Range	-40? to +100?	
Lead Soldering Temperature [4mm(.157") From Body]	260? for 5 Seconds	

### Electrical Optical Characteristics at Ta=25?

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I <sub>v</sub>	400	1000	1600	mcd	I <sub>f</sub> =20mA (Note 1)
Viewing Angle	2? <sub>1/2</sub>	25	30	35	Deg	(Note 2)
Peak Emission Wavelength	? p		468		nm	I <sub>f</sub> =20mA
Dominant Wavelength	? d	465	470	475	nm	I <sub>f</sub> =20mA (Note 3)
Spectral Line Half-Width	? ?				nm	I <sub>f</sub> =20mA
Forward Voltage	V <sub>f</sub>	3.0	3.4	3.9	V	I <sub>f</sub> =20mA
Reverse Current	I <sub>R</sub>	---	---	100	μA	V <sub>R</sub> =5V

#### Notes:

1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.

? <sub>1/2</sub> is the off-axis angle at which the luminous intensity is half the axial luminous intensity.